



Tumble dryer



Dryer featuring exceptional savings and effortless use

is a professional dryer which meets ISO6330 standard.
Combine it with FOM71CLS reference washer for a complete testing solution.



Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- Reversible door hanging for a convenient laundry flow
- Easy access to vital parts from the top and rear for simple servicing
- Stainless steel drum
- Stainless steel front



Long-term savings

Innovative features to save money and time, and embrace a sustainable lifestyle

- Residual Moisture Control for an accurate drying result and a low energy consumption



Pure control

Monitor your equipment and performance from anywhere, allowing to take action and to improve your business with OnE Laundry



Productivity

- Reversing drum for less tangling of large items



Images shown are a representation of the product only and variations may occur.

Special features

- Dedicated drying programs for ISO6330 standard + additional programs for normal drying

Options

- Stainless steel base frame

Main specifications			
Rated capacity,	filling factor 1:22	kg/lb	6/13
Drum volume		litre	130
Drum diameter		mm	575
Heating alternatives			
electric		kW	2.9/3.2
Consumption data*			
Total time full load		min	54
Energy consumption full load		kWh	2.95
Evaporation		g/min	56
Energy kWh/litre water evaporated		kWh/l	0.98

* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.
Consumption data based on bulk drying.


Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220V 1 -	50/60	2.9	3.2	16
	400V 3 -	50/60	3.2	3.5	10

Connections	
Air outlet	mm \varnothing 100
Maximum air flow	m ³ /h 150
Condensate	-
Maximum static back pressure	Pa 80
Sound levels	
Sound power/pressure level at drying*	dB(A) <70
Heat emission	
% of installed power, max	15
Shipping data**	
Shipping volume	net, kg m ³ 58 0.51
Accessories	
Stacking frame for mounting on top of WH6-6	x
Stainless steel base frame	x
Dimensions in mm	
A Width	597
B Depth	725
C Height	839
D	138
E	50
F	89
G	200
1 Operating panel	
2 Door opening \varnothing 370 mm	
3 Electrical connection	
4 Exhaust connection	


* Sound power levels measured according to ISO 60704.

** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.


Standards	
ISO 6330	Domestic washing and drying for textile testing
ISO 3758	Care labelling
ISO 3759	Preparation, dimensional change
ISO 5077	Determination, dimensional change
ISO 15487	Appearance of apparel after washing & drying
ISO 7768	Smoothness appearance
ISO 7769	Creases
ISO 7770	Smoothness appearance of seams
prEN 16732	Slide (zip) fasteners
ISO 16322	Spirality after laundering
H&M	Hennes & Mauritz

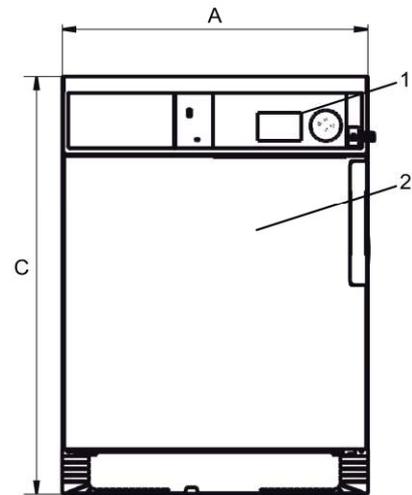

Front

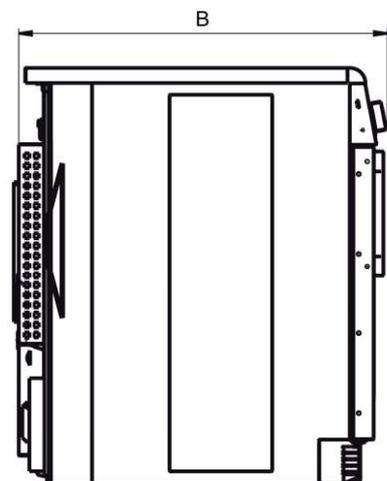

Left side

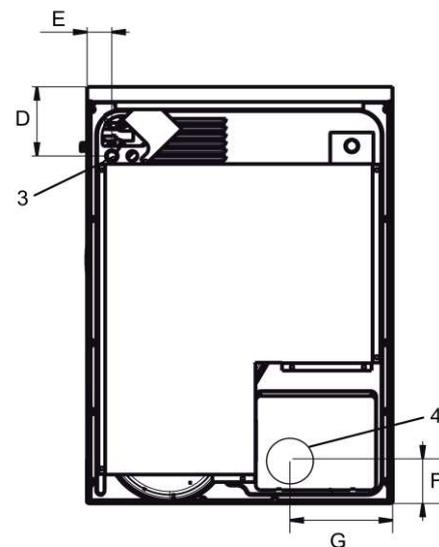

Rear side